

Epson EB-S01



The standard portable EB-S01 DLP has 2600 Ansi lumens, a contrast of 3000:1 and an SVGA 800 x 600 resolution. The manufacturer Epson specifies a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours a day. The projector can illuminate a picture width of up to 444 cm with its 2600 Ansi lumens. In room lighting, however, the image width should ideally be less than 296 cm. Even 1080P video signals are no problem for the projector. The model was built by Epson in 2018 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600 / 2080 im Eco Mode

867 Lux (bei 200 cm Screen)

Contrast

3000:1

3000:1

Black Level

0,8667 min. Lumen

0,289 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W Lamp

Articel Nr.: ELPLP67 / V13H010L67

Light Life

4000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom 1,35

Objective

f=17mm

Throw Ratio

1,45-1,96:1

Audio

1W

Connections

D-sub 15pin in

USB in

Ceiling Mounting

Yes

Power


270W / 223W in Eco Mode

Size WxHxD

295 x 77 x 228 mm (11,6"x3"x9") 5,18 L/dm³

Operating Noise


37 / 29 dB in Eco Mode

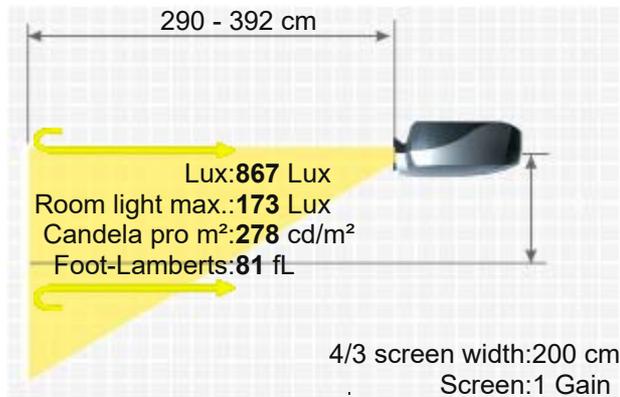

Weight

2,30 kg / 5,07 lbs.

Keystone	Vert.: +/-30°
Illumination	-
Frequenz	-
Foot-Lamberts	81 fL / max. 444 cm screen width 278 cd/m ²
Features	<ul style="list-style-type: none"> ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot
	Desktop Document Camera original
Optional	USB document camera original
	2 air filter original
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=hc1275 2018 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2020-04-28 18:13:49

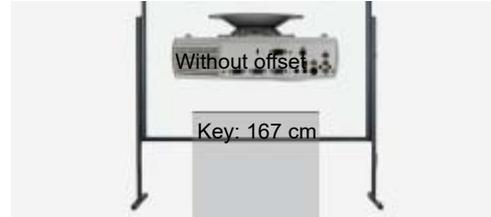

More Details



HCinema

<https://www.projector-database.com/pro/epsones01-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.